




## HT20 - TEMPERATURE AND HUMIDITY MONITOR



### HT20IoT - TEMPERATURE AND HUMIDITY MONITOR FOR IoT APPLICATIONS

HT20/HT20IoT monitor has been designed to measure, monitor and record temperature and humidity. It is a perfect solution for any facilities where monitoring and recording such values are very important for the accuracy of the whole process (for example, in server rooms, drug and food warehouses, laboratories, museums or glasshouses). The data captured by HT20/HT20IoT is stored in the internal memory and then sent digitally to the user by the Ethernet (TCP/IP, FTP) or by use of MQTT protocol (only for HT20IoT). In case of an emergency situation, the device immediately sends appropriate warnings via emails or via a website. An additional advantage of H20IoT is the possibility that it can be powered over the Ethernet. This feature is available in versions that are equipped with the Power over Ethernet system (PoE).


### EXAMPLE OF APPLICATION

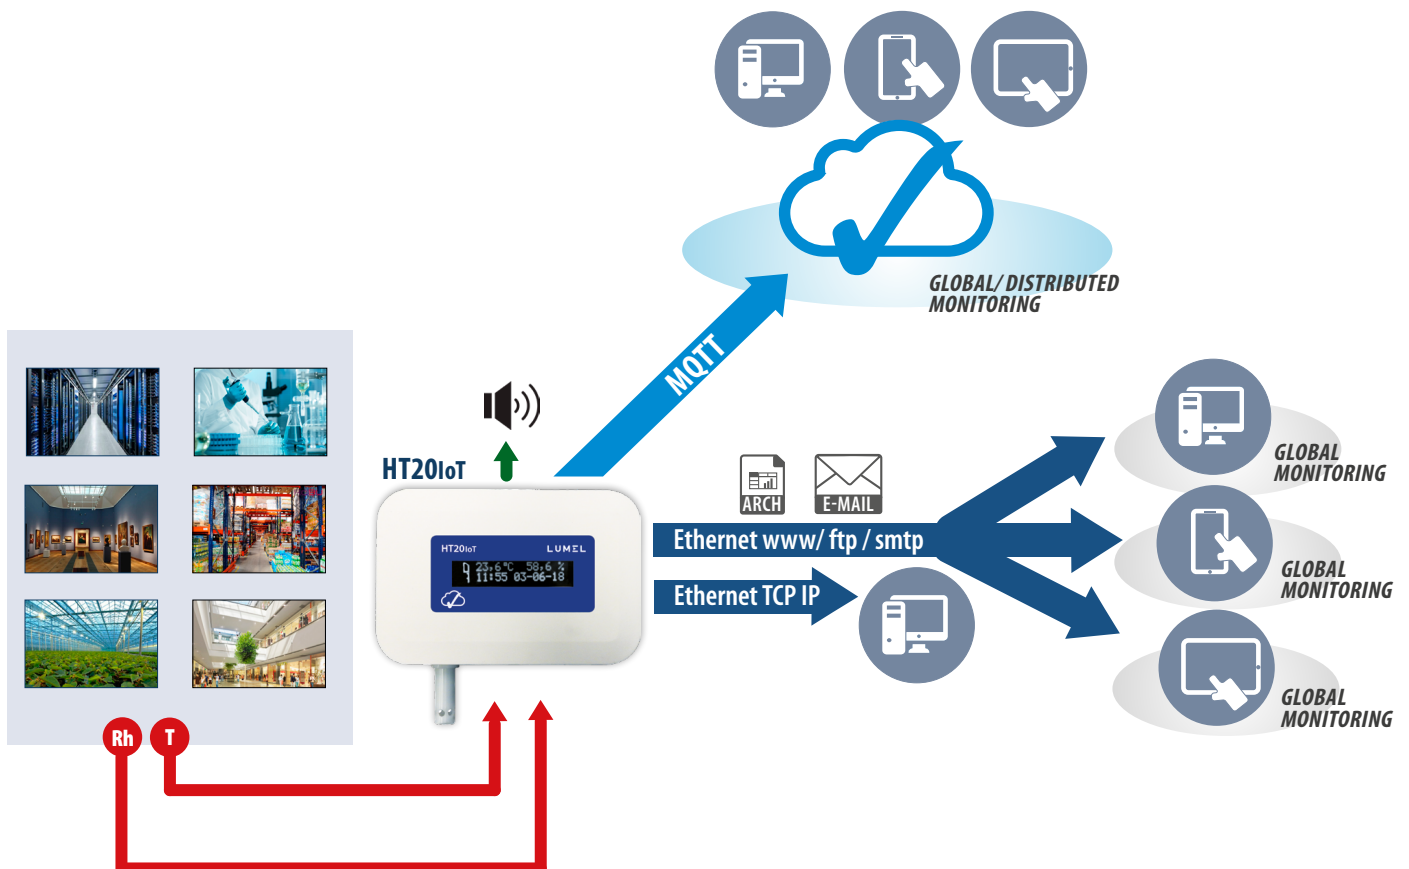

## EXAMPLE OF APPLICATION

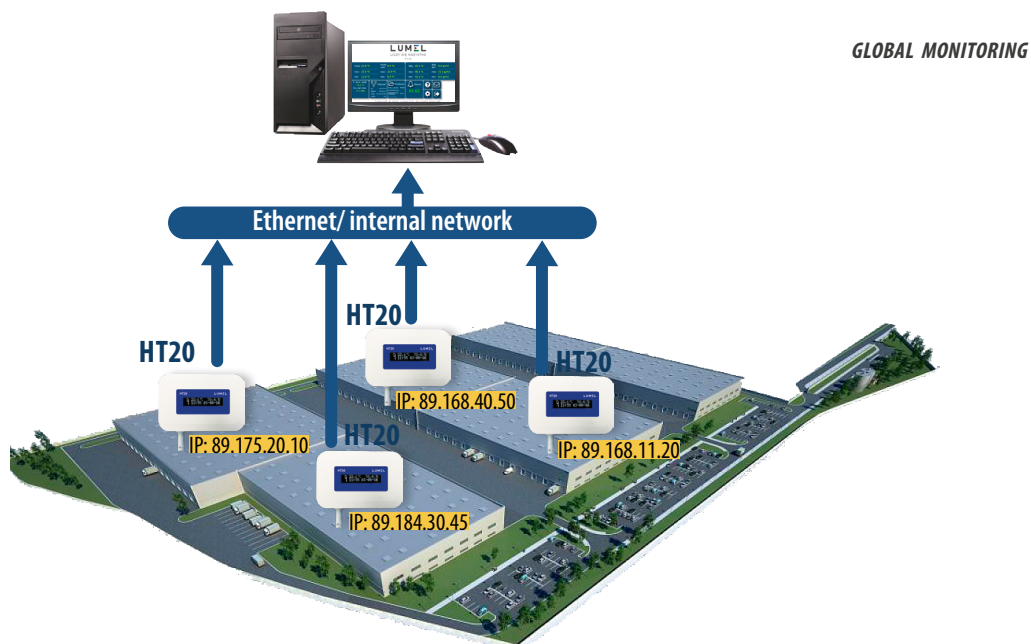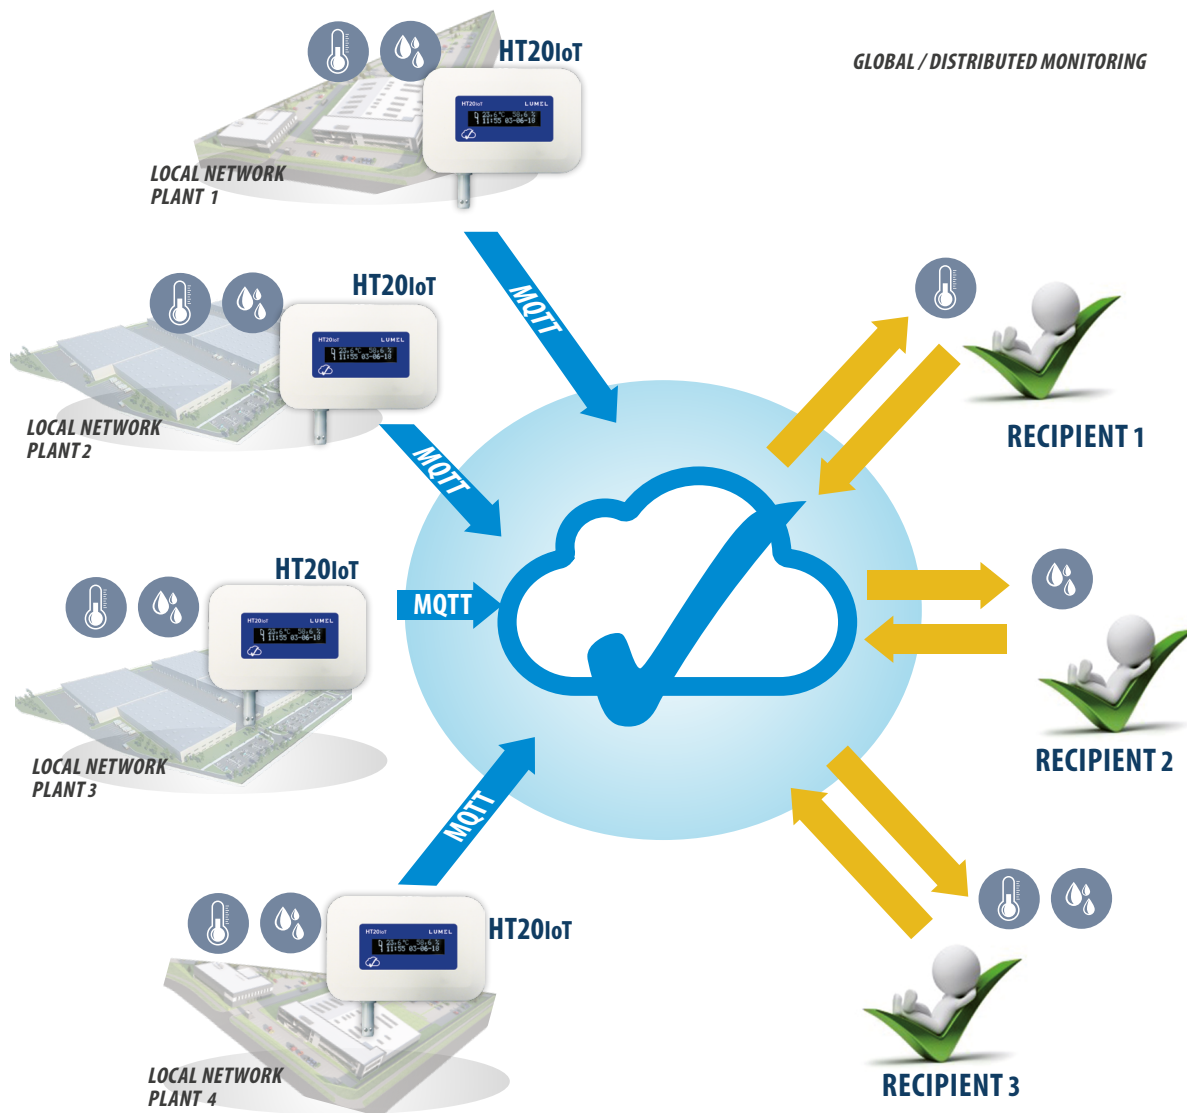

## FEATURES

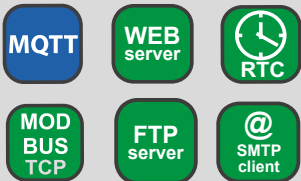

## INPUTS



## OUTPUT



## WHAT PARAMETERS CAN BE MEASURED BY HT20?

- temperature,
- relative humidity,
- dew point,
- absolute humidity or the total mass of water vapour (in grams) present in 1m<sup>3</sup> of air in a given temperature,
- wet-bulb temperature,
- vapour pressure or the pressure at which, in a given temperature, the gas is at an equilibrium with the fluid (equilibrium between evaporation and condensation),
- enthalpy (total heat content).

## HOW DOES HT20 WORK IN CASE THE PRE-SET PARAMETERS ARE EXCEEDED?

The HT20 allows up to two defined warnings. Whenever the pre-set parameters are exceeded, the HT20 will immediately signal this via:

- emails,
- messages on a dedicated website,
- special symbols on the display,
- audible alerts.

Therefore, every time the HT20 is connected to the Internet, you will always have the most up-to-date information on the actual condition of the monitored facility.

## ETHERNET INTERFACE AND ITS FUNCTIONALITY

The HT20 is equipped with the Ethernet interface enabling its connection to the local or global network (either LAN or WAN). Thanks to the user-friendly and intuitive 'www' server, you will always have access to the information regarding:

- current measurement values,
- device status.

The 'www' server call also allow you to:

- configure it
- read the serial number, manufacturing code, software version and bootloader version.

The built-in FTP server allows for fast and easy access to archive data files from the level of web browser or from other FTP clients. The DHCP protocol provides automatic configuration of the monitor in the computer network, whereas the SMTP protocol is responsible for sending the warnings via emails. The HT20 monitor can also work in more extensive systems where the communication protocol Modbus Slave TCP/IP provides a smooth and reliable reading of all current measurement data.

## MEASUREMENTS ARCHIVE

Thanks to the dedicated website, you can also check the archive data using a smartphone, tablet or a PC. There is no need to be worried about insufficient memory on the device; the HT20 has an 8GB internal file system memory where the data from the internal memory buffer (4GB) is automatically recorded as files. The memory has a form of a circular buffer and after the storage is full, the oldest files are overwritten. The internal archive can be read, copied and/or deleted.

## BASIC PARAMETERS

Relative humidity (RH)	0...95 % condensation inadmissible
Basic error of humidity processing	$\pm 3\%$ of the range for RH = 10...90% ; $\pm 5\%$ in other range
Hysteresis of humidity measurement	$\pm 1\%$ RH
Basic range of temperature measurement (T)	- 20...60 °C
Basic error of temperature processing	$\pm 0.6\text{ °C}$ in range 10...40 °C; $\pm 1.0\text{ °C}$ in other range
Calculated values	absolute humidity (a) [g/m <sup>3</sup> ] dew point temperature (Td) [°C]

## DIGITAL INTERFACE

Interface type	Transmission protocol	Remarks
Ethernet 10/100 Base-T	MQTT (HT20IoT)	
	Modbus TCP, HTTP, FTP	max. number of simultaneous connections - 10

## RATED OPERATING CONDITIONS

Supply voltage	6 V d.c. or PoE IEEE 802.3af
Power consumption	< 2 VA
Preheating time	15 minutes
Ambient temperature	- 20...23...60 °C
Relative humidity	< 95%
Protection grade ensured by housing	IP 20
Fixing way	on a wall
Weight	< 0.3 kg
Dimensions	150 x 100 x 30 mm
Operating position	sensor down

## SAFETY AND COMPATIBILITY REQUIREMENTS

Electromagnetic compatibility	Noise immunity	acc. to EN 61000-6-2
	Noise emissions	acc. to EN 61000-6-4
Pollution grade	2	acc. to EN 61010-1
Installation category	III	acc. to EN 61010-1
Maximal phase-to-earth operating voltage	50 V	acc. to EN 61010-1
Altitude above sea level	< 2000 m	


## PARAMETERS OF DC ADAPTER (OPTION):

Voltage	6 V d.c. $\pm 5\%$
Max. power	6W*
Input voltage	90...253 V a.c.
Operating temperature	0...40 °C*
External dimensions	63.6 x 29.5 x 45.6 mm*
Cable length	1.4 m $\pm 10\%$ *
Plug	$\phi$ 5.5 / 2.1 mm


\* adapter parameters can be changed

## REMOTE READOUT OF PARAMETERS THROUG ETHERNET: WWW SERVER, FTP


main page view

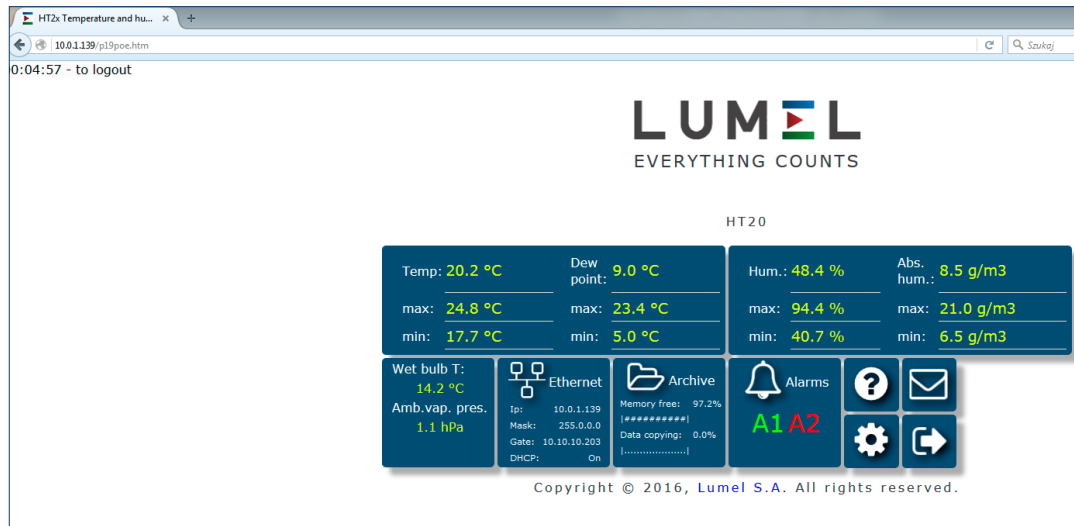

temperature trend view

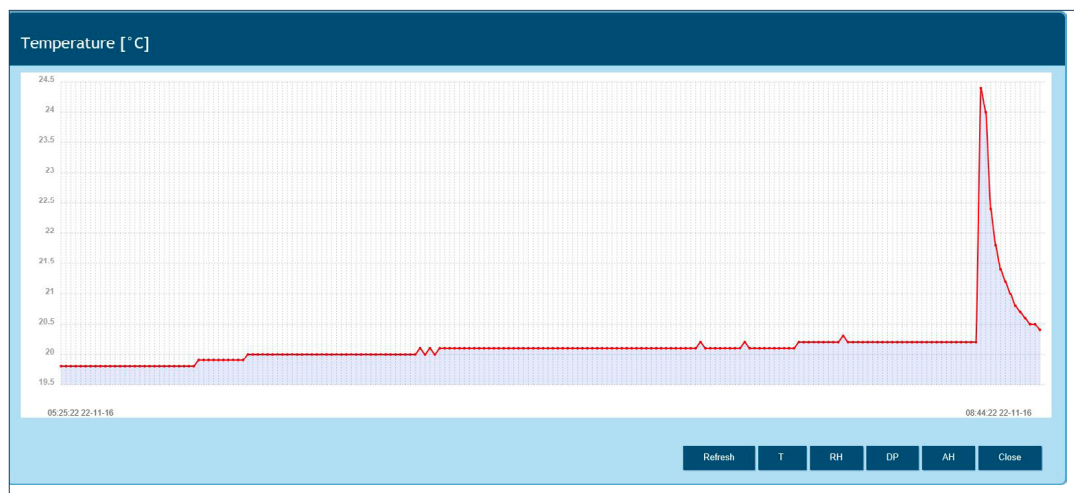

humidity trend view

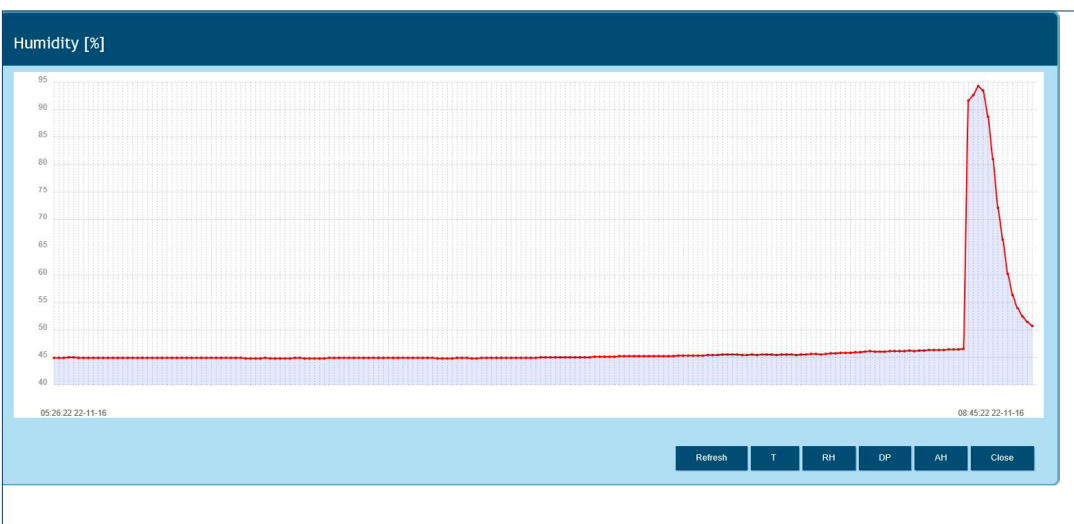

## REMOTE READOUT OF PARAMETERS THROUGH ETHERNET: WWW SERVER, FTP

### alarms and archive programming

**Alarms**

Choose setting: Alarm 1 configuration settings

Alarm control parameter: Temperature

Alarm working mode: on

Alarm threshold - lower val.: 27

Alarm threshold - upper val.: 27.5

Alarm ON delay [s]: 0

Alarm Off delay [s]: 0

Re-switching alarm delay [s]: 60

Alarm output (once C/R/L to check many): Buzzer

Buttons: Save, Close

**Archive**

Archive values: Temperature, Humidity, Dew point, Absolute Humidity

Conditional archiving - val.: Temperature

Archive type: on

Cond. archiving - lower threshold: 0

Cond. archiving - upper threshold: 20

Archiving period [s]: 60

Internal memory threshold which forces file writing: 50

Point separator: .

Field separator: Tab

Delete archive: ☐

Move archive to file sys. mem.: ☐

Buttons: Save, Browse dir's, files, Close

### eg of email of cyclic measurements - sent at a specified time period

**Skrzynka odbiorcza**

Od	Temat
HT20	HT20 - index: 11 - Period elapsed:15 min
HT20	HT20 - index: 10 - Period elapsed:15 min
HT20	HT20 - index: 9 - Period elapsed:15 min

**HT20 - index: 6 - Period elapsed:15 min**

HT20

Wysłano: Brak

Do: m.ponos@lumel.com.pl

**2016-09-23 09:45:00**

T [°C]: 21,3;  
RH [%]: 45,7;  
DP [°C]: 9,1;  
AH[g/m3]: 8,5;

### eg of mail alert - temperature exceeding

**Skrzynka odbiorcza**

Od	Temat
HT20	HT20 - Alarm 1 T [°C] - ACTIVE

**HT20 - Alarm 1 T [°C] - ACTIVE**

HT20

Wysłano: Brak

Do: m.ponos@lumel.com.pl

**2016-09-26 08:37:30**

T [°C]: 23,9;  
RH [%]: 94,2;  
DP [°C]: 22,9;  
AH[g/m3]: 20,4;

## ORDERING

Temperature and humidity monitor HT20 -	X	X	XX	X	X
<b>Supply*:</b>					
6 V d.c.	1				
6 V d.c. , PoE IEEE 802.3af	2				
<b>Accessories:</b>					
none	0				
adapter 6 V d.c.	1				
<b>Version:</b>					
standard			00		
custom-made**			XX		
<b>Language:</b>					
English /Polish				M	
other**				X	
<b>Acceptance tests:</b>					
without additional quality requirements				0	
with an extra quality inspection certificate				1	
acc.to customer's request					X

\* - Monitors in version HT20 1XXXXX require an external power supply 6 V d.c., in version HT20 2XXXXX they can be powered either from Ethernet PoE (Power over Ethernet), as well as from the external power supply 6 V, D.C.

\*\* - after agreeing with the manufacturer

### Order example:

Code: HT20-2-1-00-M-1 means:

HT20 - HT20 monitor

2 - supply: PoE IEEE 802.3af and 6 V d.c.

1 - with attached AC 6 V d.c. adapter included

00 - standard version

M - user's manual in English/Polish

0 - without additional quality requirements

## ORDERING

Temperature and humidity monitor <b>HT20IoT</b> -	X	X	MQ	X	X
<b>Supply*:</b>					
6 V d.c.	1				
6 V d.c., PoE IEEE 802.3af	2				
<b>Accessories:</b>					
none	0				
adapter 6 V d.c.	1				
<b>Version:</b>					
MQTT			MQ		
<b>Language:</b>					
English /Polish				M	
other**				X	
<b>Acceptance tests:</b>					
without additional quality requirements				0	
with an extra quality inspection certificate				1	
acc.to customer's request				X	

\* - Monitors in version HT20IoT 1XMQXX require an external power supply 6 V d.c., in version HT20IoT 2XXXXX they can be powered either from Ethernet PoE (Power over Ethernet), as well as from the external power supply 6 V, D.C.

\*\* - after agreeing with the manufacturer

### Order example:

Code: **HT20IoT-2-1-MQ-M-1** means:

**HT20IoT** - HT20IoT monitor

**2** - supply: PoE IEEE 802.3af and 6 V d.c.

**1** - with attached AC 6 V d.c. adapter included

**MQ** - MQTT version

**M** - user's manual in English/Polish

**0** - without additional quality requirements

### ACCESSORIES:

Accessory	View	Ordering code	Technical data
6 VDC adapter		20-072-00-00094	Voltage: 6 V d.c. $\pm$ 5% Max. power: 6W* Input voltage: 90...253 V a.c. Operating temperature: 0...40°C* External dimensions: 63.6 x 29.5 x 45.6 mm* Cable length: 1,4 m $\pm$ 10%* Plug: $\phi$ 5,5 / 2,1 mm  * adapter parameters can be changed
PoE adapter		20-090-00-00022	Input voltage: 100 – 240 VAC Input frequency: 47 – 63 Hz Power consumption: 0.35 A max. for 240 VAC Output voltage: 48 VDC Output power: 15.4 W Operating temperature: 0 – 40 °C External dimensions: 140 x 65 x 36 mm Weight: 0.2 kg
conductor for PoE adapter		20-069-00-00146	Cable length: 1.8 m

### LUMEL S.A.

ul. Słubicka 4,  
65-127 Zielona Góra, Poland  
tel.: +48 68 45 75 100

### Technical Support & Export Department:

tel.: +48 68 45 75 146, (WhatsApp) +48 536 550 007  
+48 68 45 75 130, (WhatsApp) +48 733 393 603  
e-mail: export@lumel.com.pl

### Calibration & Attestation:

e-mail: laboratorium@lumel.com.pl